




WING TON AIR CIRCULATOR



460mm



460mm

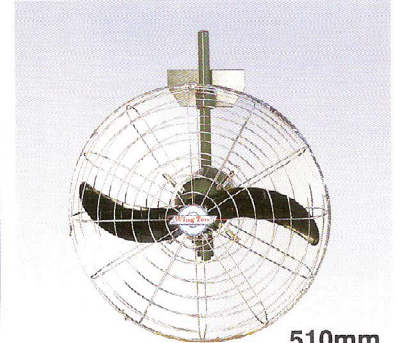


510mm
630mm

FS SERIES.

1. Standing Air Circulator.
2. Available in 460mm, 500mm & 630mm.
3. Fan motor is totally enclosed construction with dust seals, class E insulation and squirrel cage induction type with capacitor start and run.
4. Fan blade is made of high quality aluminum and is fully balanced.
5. The fan guard is a closely meshed, epoxy powder-plated wire guard, The gap between guard wires is 13mm(Safety Guard)
6. The fan speed is adjustable by 3 speed and off regulator.
7. Fan is equipped with a height adjustable mechanism and supported by a strong cast iron base.
8. Provided with a 3-core flexible cable of 4.5 meters in length.
9. The fan is provided with oscillating and tilting mechanism for horizontal swing and vertical adjustment respectively.
10. Products designed according to BS EN 60335-2-80.
11. Manufactured to ISO 9002.

FW SERIES.

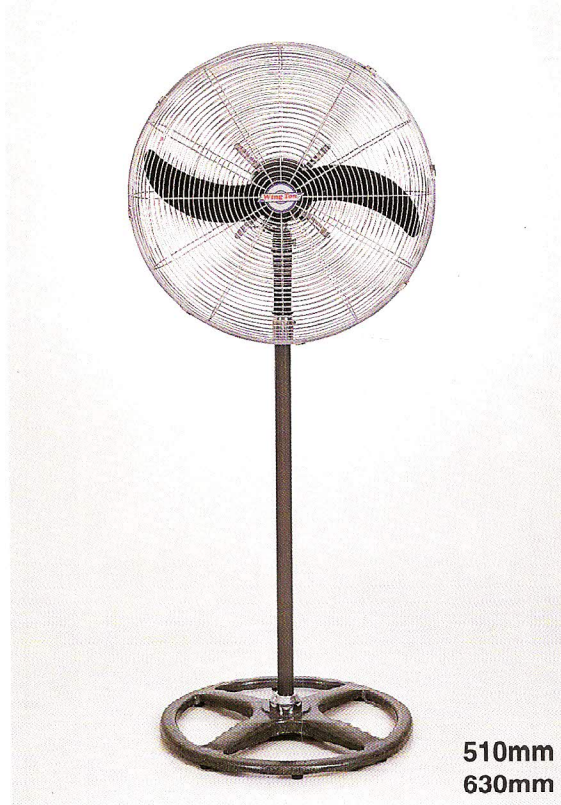

510mm
630mm

1. Wall mounting Air Circulator.
2. Available in 460mm, 500mm & 630mm.
3. Fan motor is totally enclosed construction with dust seals, class E insulation and squirrel cage induction type with capacitor start and run.
4. Fan blade is made of high quality aluminum and is fully balanced.
5. The fan guard is a closely meshed, epoxy powder-plated wire guard. The gap between guard wires is 13mm (Safety Guard) or 43mm (Normal Guard).
6. The fan speed is adjustable by 3 speed and off regulator.
7. Provided with wall mounting kits and must be installed 2.3 meter above ground floor.
8. Provided with a 3-core flexible cable of 2 meters in length.
9. The fan is provided with oscillating and tilting mechanism for horizontal swing and vertical adjustment respectively.
10. Products designed according to BS EN 60335-2-80.
11. Manufactured to ISO 9002.



EN ISO 9002

CERTIFICATE NO.041008039



EMC

